

KB DUCT SERIES 1000 CLAMP

| One Handed Installation, Integrated Safety Lock, and Reusability

EASY TO INSTALL

The KB Duct Series 1000 Clamp, to be used with KB Duct Series 1000 Clamp Together Ducting, is designed for one handed installation to allow fast, safe, and reliable duct clamping.

FULL SUITE OF COMPONENTS

The Series 1000 Clamp is also optimized with KB Duct's full suite of Series 1000 Clamp Together products. From elbows to reducers and beyond, the Series 1000 is the clamp you need to get the job done.

ONE HANDED INSTALLATION

Your second hand is now free to align the duct.

SAFETY LOCK

Built-in lockout means no separate equipment needed (available in 7" dia and up).

REUSABLE GASKET*

Use the clamp over and over again as your system grows and changes.



Applications

- Semiconductor
- Chemical Production
- Wood Products
- Pulp & Paper
- Battery/Fuel Cells
- Thin Films

Features

- Wide Profile & Overlap
- Semi-Compliant Gasket
- Integrated Lockout

Benefits


- One Handed Installation
- Strong Sealing & Reusability
- Built In Safety

HOW TO ORDER

Contact KB Duct Headquarters or your Regional Sales Manager today to place an order for KB Duct's full suite of Series 1000 Products!

MATERIALS

The Series 1000 clamp can be ordered in galvanized steel. The gasket is available in Nitrile, Silicone, ePTFE, and Viton depending on the temperature range of your system.

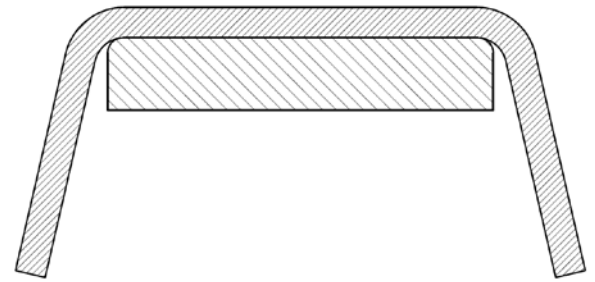

PROFILE CROSS SECTION



Diameter (in)	Weight Galvanized (lbs)	Weight Stainless (lbs)
3"	0.168	0.170
4"	0.190	0.192
5"	0.247	0.250
6"	0.281	0.284
7"	0.570	0.576
8"	0.616	0.623
9"	0.742	0.750
10"	0.790	0.798
11"	0.910	0.920
12"	0.956	0.966
13"	1.008	1.019
14"	1.052	1.063
15"	1.109	1.121
16"	1.154	1.166
17"	1.202	1.215
18"	1.253	1.266
19"	1.301	1.315
20"	1.468	1.484
22"	1.563	1.580
24"	1.661	1.679

CONTACT US

Headquarters KB DUCT

8735 West Market Street
Greensboro, NC 27409
USA

Contact Info

www.cecoenviro.com
Toll Free: 866.562.3828
Phone: 336.668.3773
Fax: 336.668.0043

*Gasket is not infinitely reusable and will eventually wear out depending on application and usage.
Disclaimer: The data and information contained in these data sheets are representative; the ratings supplied are suggested as guidelines and should only be used for evaluating your specific application. When in doubt, contact CECO Environmental for a full review. The information contained in these data sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. In no event shall CECO Environmental be liable for any incidental or consequential damages resulting from the use, misuse or inability to use the product. This exclusion applies regardless of whether such damages are sought based on breach of warranty, breach of contract, negligence, strict liability in tort, or any other legal theory.

*Series 1000 available 3" – 14"